



Project :

Type :

Part#:

Round Canopy Fixtures

3-Power Selectable & 3-Color Selectable

IS Canopy Series

Detail Specifications:

- Finish: White or Bronze
- IP Rating: Wet Location (IP65)
- Beam Angle: 150°
- Chip: SMD 2835, R9 >50, CRI >80
- 3 Step MacAdam Ellipses
- Operating Temperature: -4° - 124° F
- Lens: Clear Ribbed
- Average life (L70) of 50,000 hours

Applications:

- Utility & Storage
- Garage & Parking Structures
- Dock and loading
- Soffits
- Outdoor corridor
- Commercial and Industrial

Product Information:

- Sturdy di-cast aluminum housing finished with corrosion free powder coat
- Four 1/2" knockouts: 1 one each side for convenient installation
- Twist-C Technology
- Select-N-Switch Technology

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- THD: <15% (=/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

Mounting & Installations:

- 30 or 40 J-Box Surface Mount
- 3/4" Pendant Mount

Certifications:

- UL Listed for USA and CA
- DLC Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017



ISHB03R

Remote Control



Motion Sensor

WATT	LUMENS
15	1,950
20	2,600
25	3,250
30	3,900
40	5,200
50	6,500
60	7,800
70	9,100
80	10,400
90	11,700
100	13,000

Series	Wattage	COLOR	EMB	Optional Accessories (Order Separately)
ISCNPYR – Round Slim Canopy Light	5WS55 22/30/38.5/47/55W 120-277V	3CS 30/40/50K	(Blank) No Emergency Back-Up	Sensor Remote
	5WS100 60/70/80/90/100W 120-277V		EMB 90 Min. Emergency Back-up	ISHB01DMS-A Bi-Level Motion + Daylight Sensor
				ISHB03R Remote for HB01DMS-A

Round Canopy Fixtures

3-Power Selectable & 3-Color Selectable

FEATURES

Aluminum Housing

Built with an aluminum housing, this fixture is built to last

6 1/2" Knockouts

Located on 4 sides is built to last

Ribbed Lens



Reduces glare to avoid eye discomfort

Integrated Driver

This fixture is dimmable with the IP65-rated, 100-277vac integrated driver

Reverse-Throw Lighting

Provide unparalleled lighting for parking structures with unique reverse-throw lighting, which emits light upward as well as down

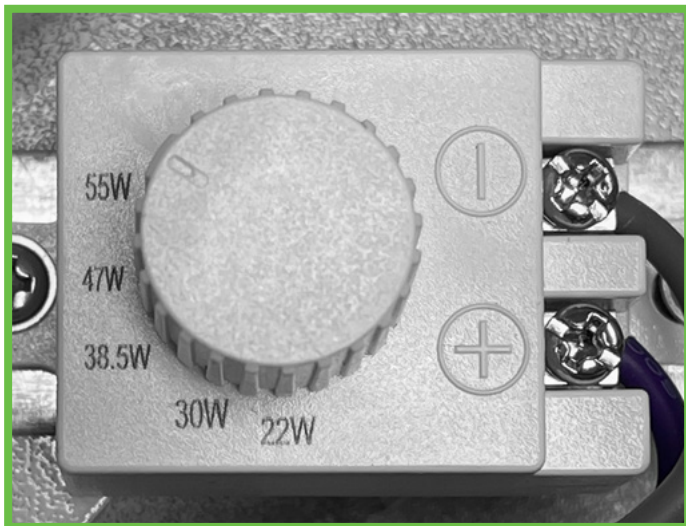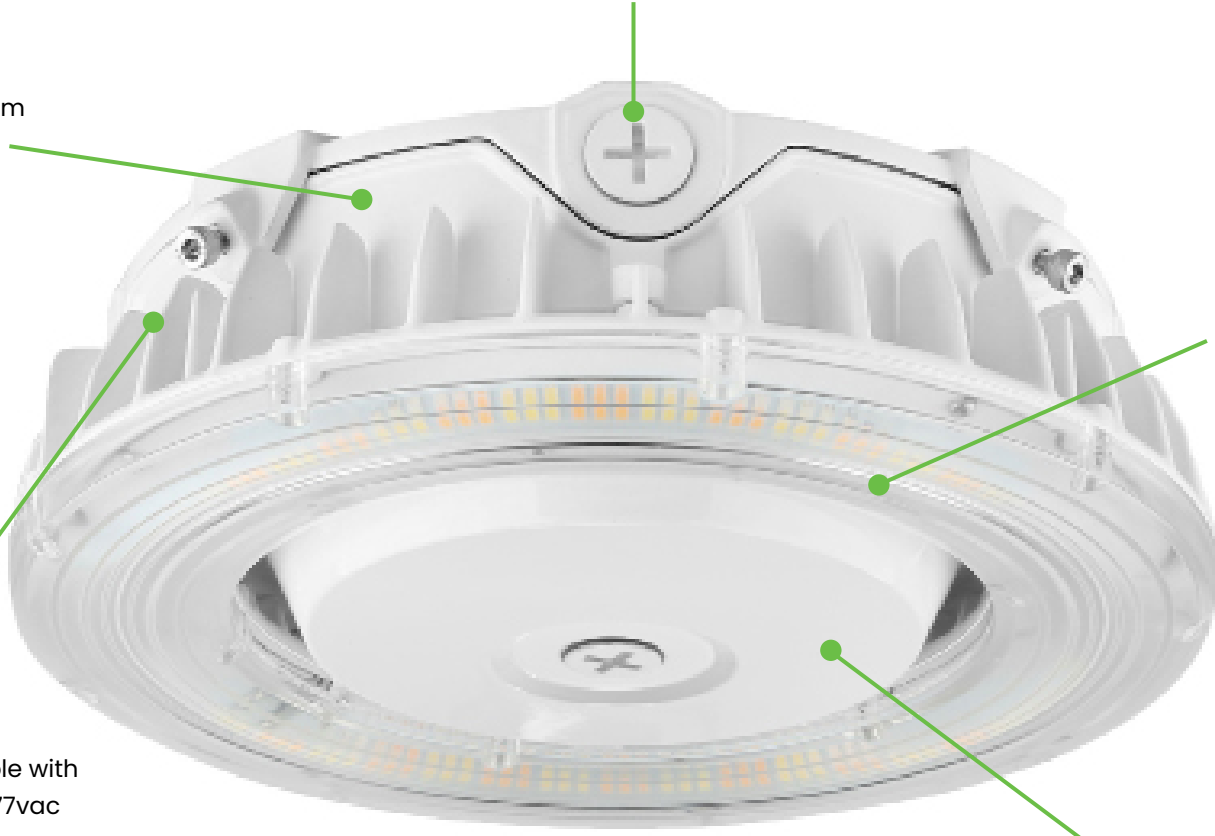

5-Watt Selectable
Select between 5 different wattages




3-Color Selectable
Select between 3 different colors

Round Canopy Fixtures

3-Power Selectable & 3-Color Selectable

DIMENSIONS

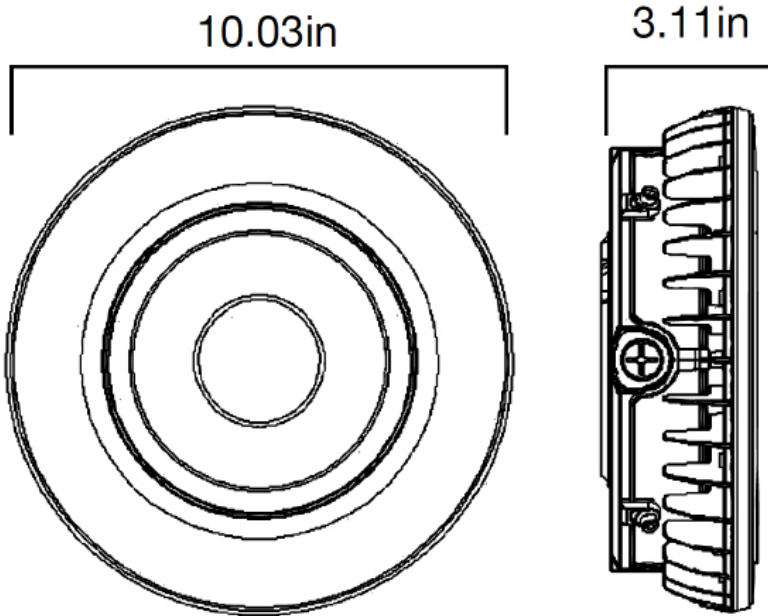

Mounting:

- Easy surface mount installation with universal mounting plate
- Easy 1" Ø pendant mount/stem installation
- Pre-wired circuit wiring built in (3 in / 3 out)
- 3/4" Ø Knockouts located on 4 sides

Model	Voltage	Watts	Lumens	Color	CRI
ISCNPYR-5WS55CS3-WH	120-277V	22/30/38.5/47/55w	145lm/w	30/40/50k	>80
ISCNPYR-5WS100CS3-WH	120-277V	22/30/38.5/47/55w	145lm/w	30/40/50k	>80
ISCNPYR-5WS55CS3-BZ	120-277V	22/30/38.5/47/55w	145lm/w	30/40/50k	>80
ISCNPYR-5WS100CS3-BZ	120-277V	22/30/38.5/47/55w	145lm/w	30/40/50k	>80

ACCESSORIES

Accessory Model	Description
ISHB03R	Remote for HD Sensors 130lm/w
ISHB01DMS-A	Motion+Daylight Sensor (HB03R Remote Req)



ISHB03R
Controller



ISHB01DMS-A
Sensor