



Project :

Type :

Part#:

T8 LED Tube (TypeB) Series

5CCT & 3 Power Selectable

IS T8 LED Tube (TypeB)


Detail Specifications:

- Body Nano: Plastic
- End cap: G13
- Lens: Frosted
- Input Voltage: 120-277Vac,50/60Hz
- Power Factor: 0.9
- Available colors: 3000K/3500K/4000K/5000K/6500K
- CRI: Ra83
- Dimming: Dimmable, PVTECH 0-10V dimming module
- Lifetime: 50,000 Hours
- Warranty: 5 Years
- Environmental Requirements:
 - Operation temp: -20°C to 45°C
 - Storage temp: -20°C to 85°C
 - Relative Humidity: 45% to 85%
 - Non-corrosive environments
- Size 4ft: A:1198.0mm, B:1205.0mm, C:1213.0mm D:26 mm



Product Information:

- PVTECH Type B T8 is a ballast bypass tube as special replacement for traditional fluorescent T8 lamps.
- Single ended ballast bypass.
- 5CCT switchable + 3 wattage switchable
- DLC5.1: Dimmable, PVTECH 0-10V dimming module
- Reduce energy consumption up to 60%.
- Shatterproof design: Meets NSF requirements.
- Automatic production, high product consistency.
- Lifespan: 50,000hrs
- Warranty: 5 years.

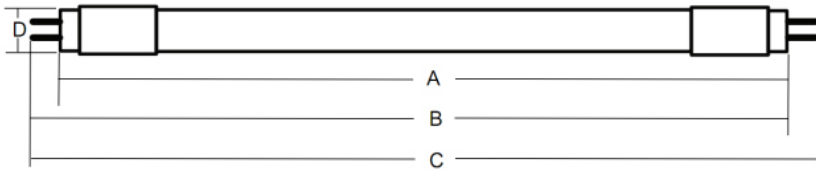

WIRING DIAGRAM:

TYPE B (AC directly, single end ballast bypass) - Assembly introduction:



Single Ended Input (Type B)

Input Voltage: AC120-277V 50/60Hz

Item No.	Power	CCT	Lumen	PF	Beam angle	Field Angle
INS-4FT-12.18WB6MS-11K	12-15-18W	30-35-40-50-65K	1620lm, 1950lm, 2300lm	0.9	220°	320°