



G25 Sports light Series

3-Power Selectable & Remote Capable



WATT	LUMENS
300	39,000
450	58,500
600	78,000
800	124,000
1000	130,000
1200	156,000

Project :

Type :

Part#:

IS Sports Lights Series G25

Detail Specifications:

- Finish: Black (made to order colors available)
- IP Rating: Wet Location
- Beam Angle: 20° NEMA 3 standard (Wider custom optics available)
- Color: 5000K
- Chip: SMD 3030, R9 >50, CRI >80
- Operating Temperature: -40° - 114° F
- Lens: PC Lens: Clear acrylic with optics
- EPA:
 - 3P600: 3.0FT²
 - 3P1200: 3.4FT²
- Average life (L70) of 70,000 hours

Applications:

- Sports Arenas and Recreational Fields
- Yard, Barn, Agriculture lighting
- High mast
- Outdoor Lighting

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- 5 beam angle options available
- Shield is included with every fixture
- Select-n-Switch Technology : 3-Power Selectable
- Instant-On to full brightness
- 3' power cord standard on all fixtures

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- HV: 220-480V 0-10V Dimmable
- Built in 10Kv Surge Protector
- DMX512 dimming standard for theatrical effects
- Compatible with Synapse Wireless & AVI-ON controls
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installations:

- Standard yoke mount included
- Optional slip fitter available
- Head tilts up and down 90°
- Remote capable driver up to 70 feet away from the fixture
- See installation guide for more details

Certifications:

- UL Listed for USA and CA
- DLC Premium Listed
- ROHS Compliant
- IESNA LM-79 & LM-80 tests available
- Approved for CA T24
- ANSI 3G Vibration Rated
- FCC CFR 47, GCC Part 15, Subpart B:2017
- 5 Year Limited Warranty

G25 Sports light Series

3-Power Selectable & Remote Capable

Series	Voltage ¹	Finish ²	Optic	Photocell
ISSPLG25-3WS60050 300/450/600W • 120-277V Yoke Mount	UNV 120-277V	BLK (Standard)	(Blank) 20° NEMA 3	(Blank) No Photocell
ISSPLG25-3WS120050 800/1,000/1,2005W • 120-277V Yoke Mount	HV 220-480V	CS² CUSTOM COLOR	30D 30° 60D 60°	PC Dusk to Dawn Photocell


1. Standard quick ship is UNV. HV is made to order locally.

2. Standard quick ship is black. Other colors are custom finishes available at the factory level.

Optional Accessories (Order Separately)

Mounts	Laser Aiming Device	Extension Cable
ISSPL-SF Field Installable Slip Fitter	ISSPL-LSR Laser Aiming Device	ISSPL-EXT35 Extension for remote mount driver. Put up to two together.

FEATURES

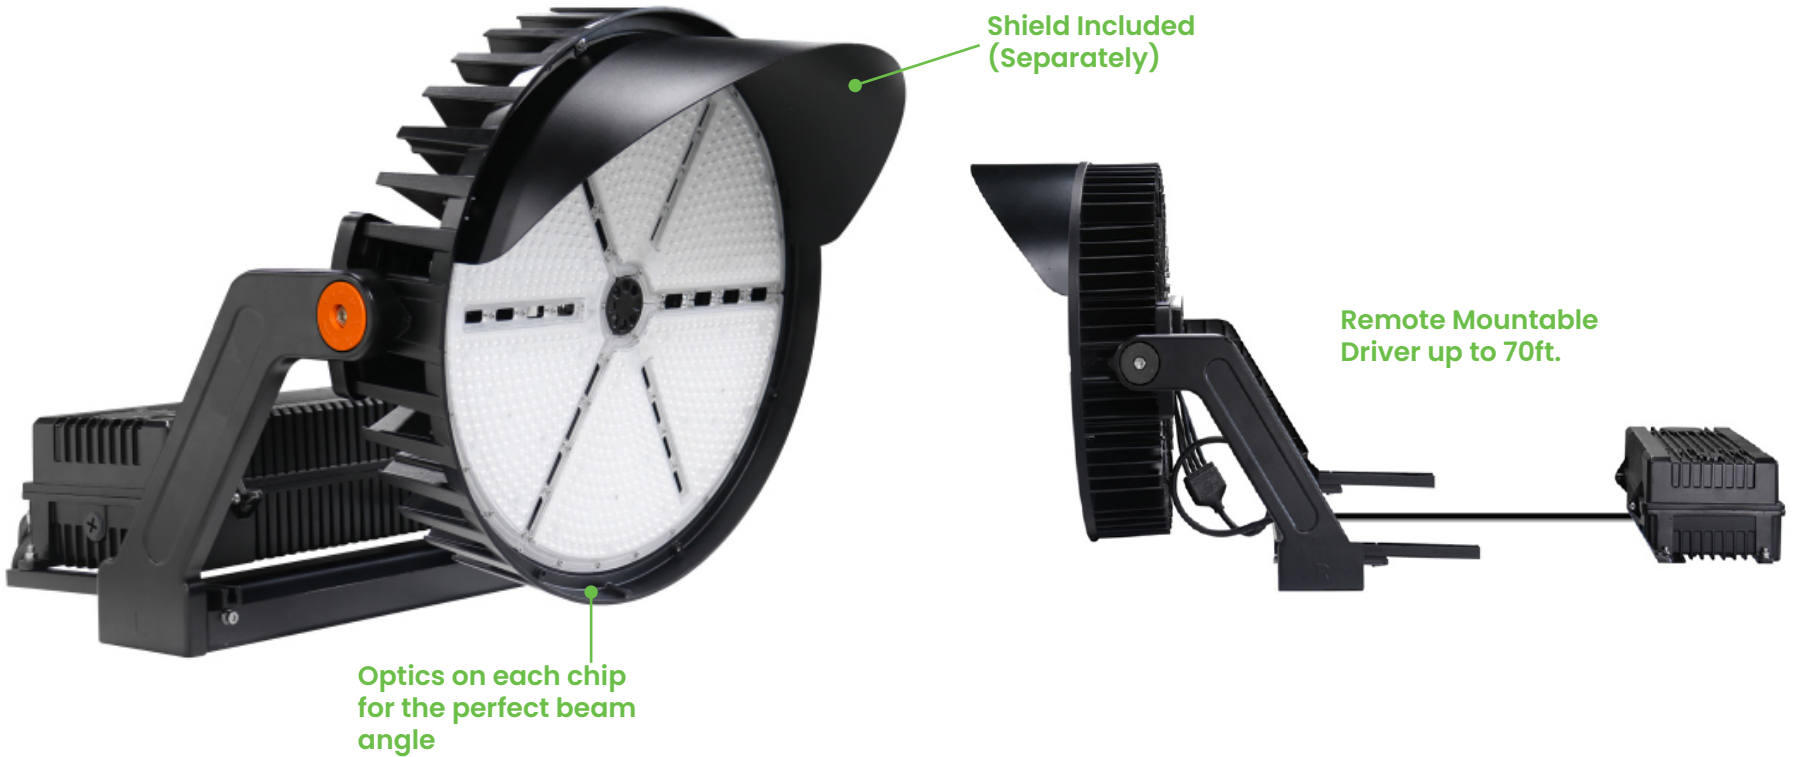

Remote Mountable Driver up to 70ft.



ISSPL-LSR
Laser beam pointer available



Front

G25 Sports light Series

3-Power Selectable & Remote Capable



Heat Cooling Grill

Photocell Slot

Adjustable up/down yoke bracket


Selectable Wattage

Waterproof Knockouts


G25 Sports light Series

3-Power Selectable & Remote Capable

FEATURES 600W

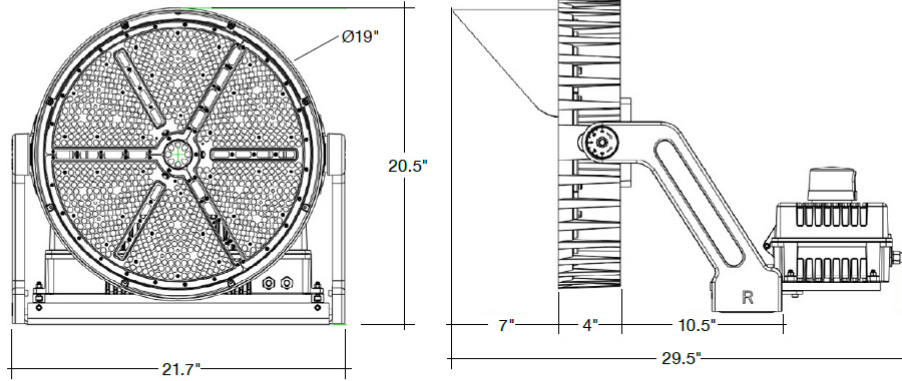


Yoke Mount

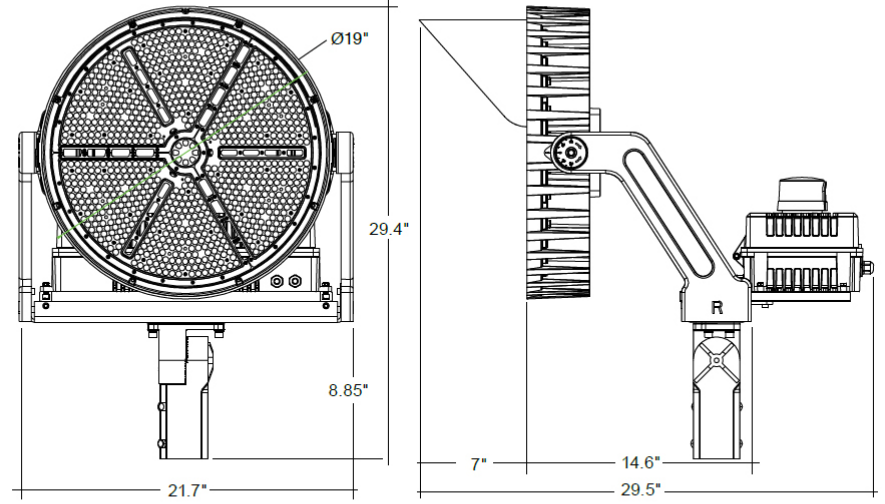


Slip Fitter

1200W

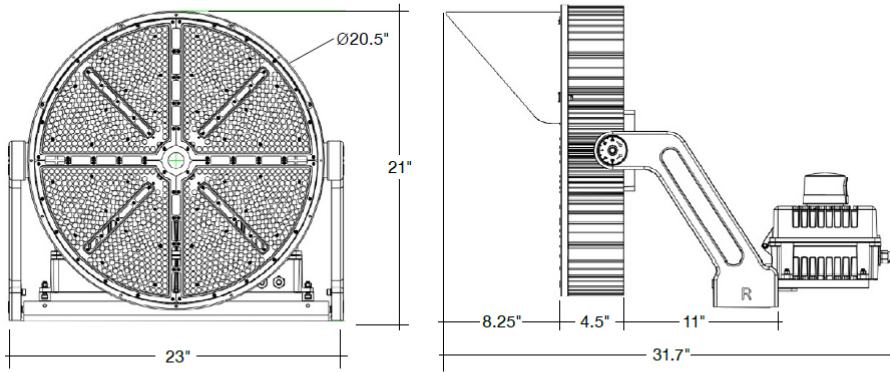

Yoke Mount

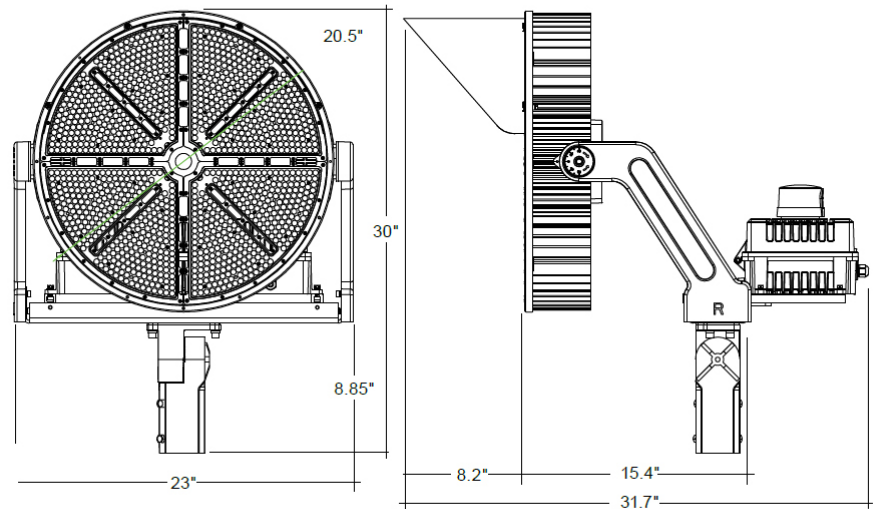

Slip Fitter

G25 Sports Light

Model	Voltage	Watts	Lumens	Color	CRI
ISSPLG25-3WS60050	120-277V	300/450/600W	130lm/w	5000k	>80
ISSPLG25-3WS120050	120-277V	800/1000/1200w	130lm/w	5000k	>80

MAGNA-Line: Sports Light Fixtures


3-Power Selectable & Remote Capable

ACCESSORIES

Model	Description
ISSPL-SF	Field Installable Slip Fitter
ISSPL-LSR	Laser Aiming Device
ISSPL-EXT35	Extension Cable



ISSPL-SF

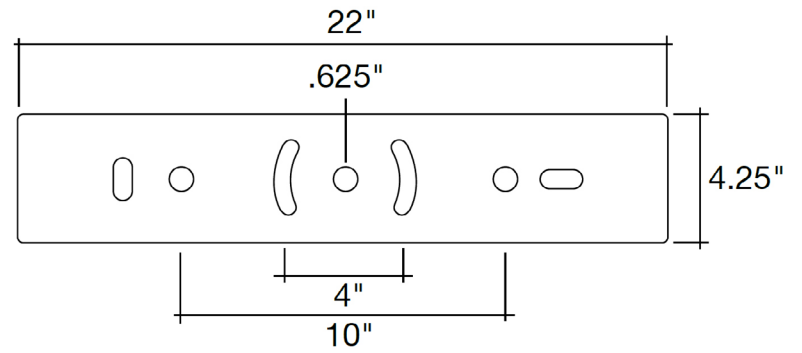

ISSPL-LSR



ISSPL-EXT35

EPA RATING & GROSS WEIGHT

Model	Weight	EPA Rating	Bug
ISSPLG25-3WS60050	47 LBS.	3.0FT2	B5-UO-G5
ISSPLG25-3WS120050	78 LBS.	3.4FT2	B5-UO-G5